

180 、 - 184 - 186 MASK VALUE DEST. PORT 1b MAC **VLAN** SRAM **ADDRESS ADDRESS** ID **ADDRESS** (32 bits) (5 bits) (5 bits) (48 bits) (12 bits) 182 6'H0 6'H1 6'H2 6'H3 6'H4 6'H3b 6'H3c 6'H3d 6'H3e 182 -6'H3f

FIG. 4

FIG. 5

	actions							1	•
256	PROGRAMMABLE FIELDS								
254	T0S								
252	PROTOCOL					-	-		
250	TSS/USS			•					
248	TDS/UDS								
246	IPSA (IP SOURCE ADDRESS)				,				,
244	IPDA (IP DESTINATION ADDRESS)				-				
240		24.5	> 74.7					249	<u>}</u>

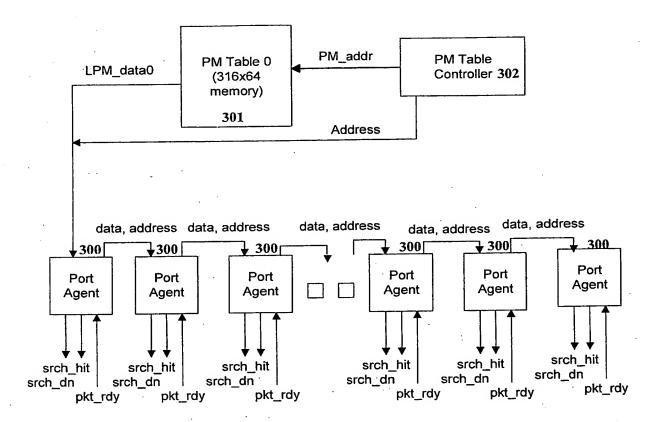


Figure 7